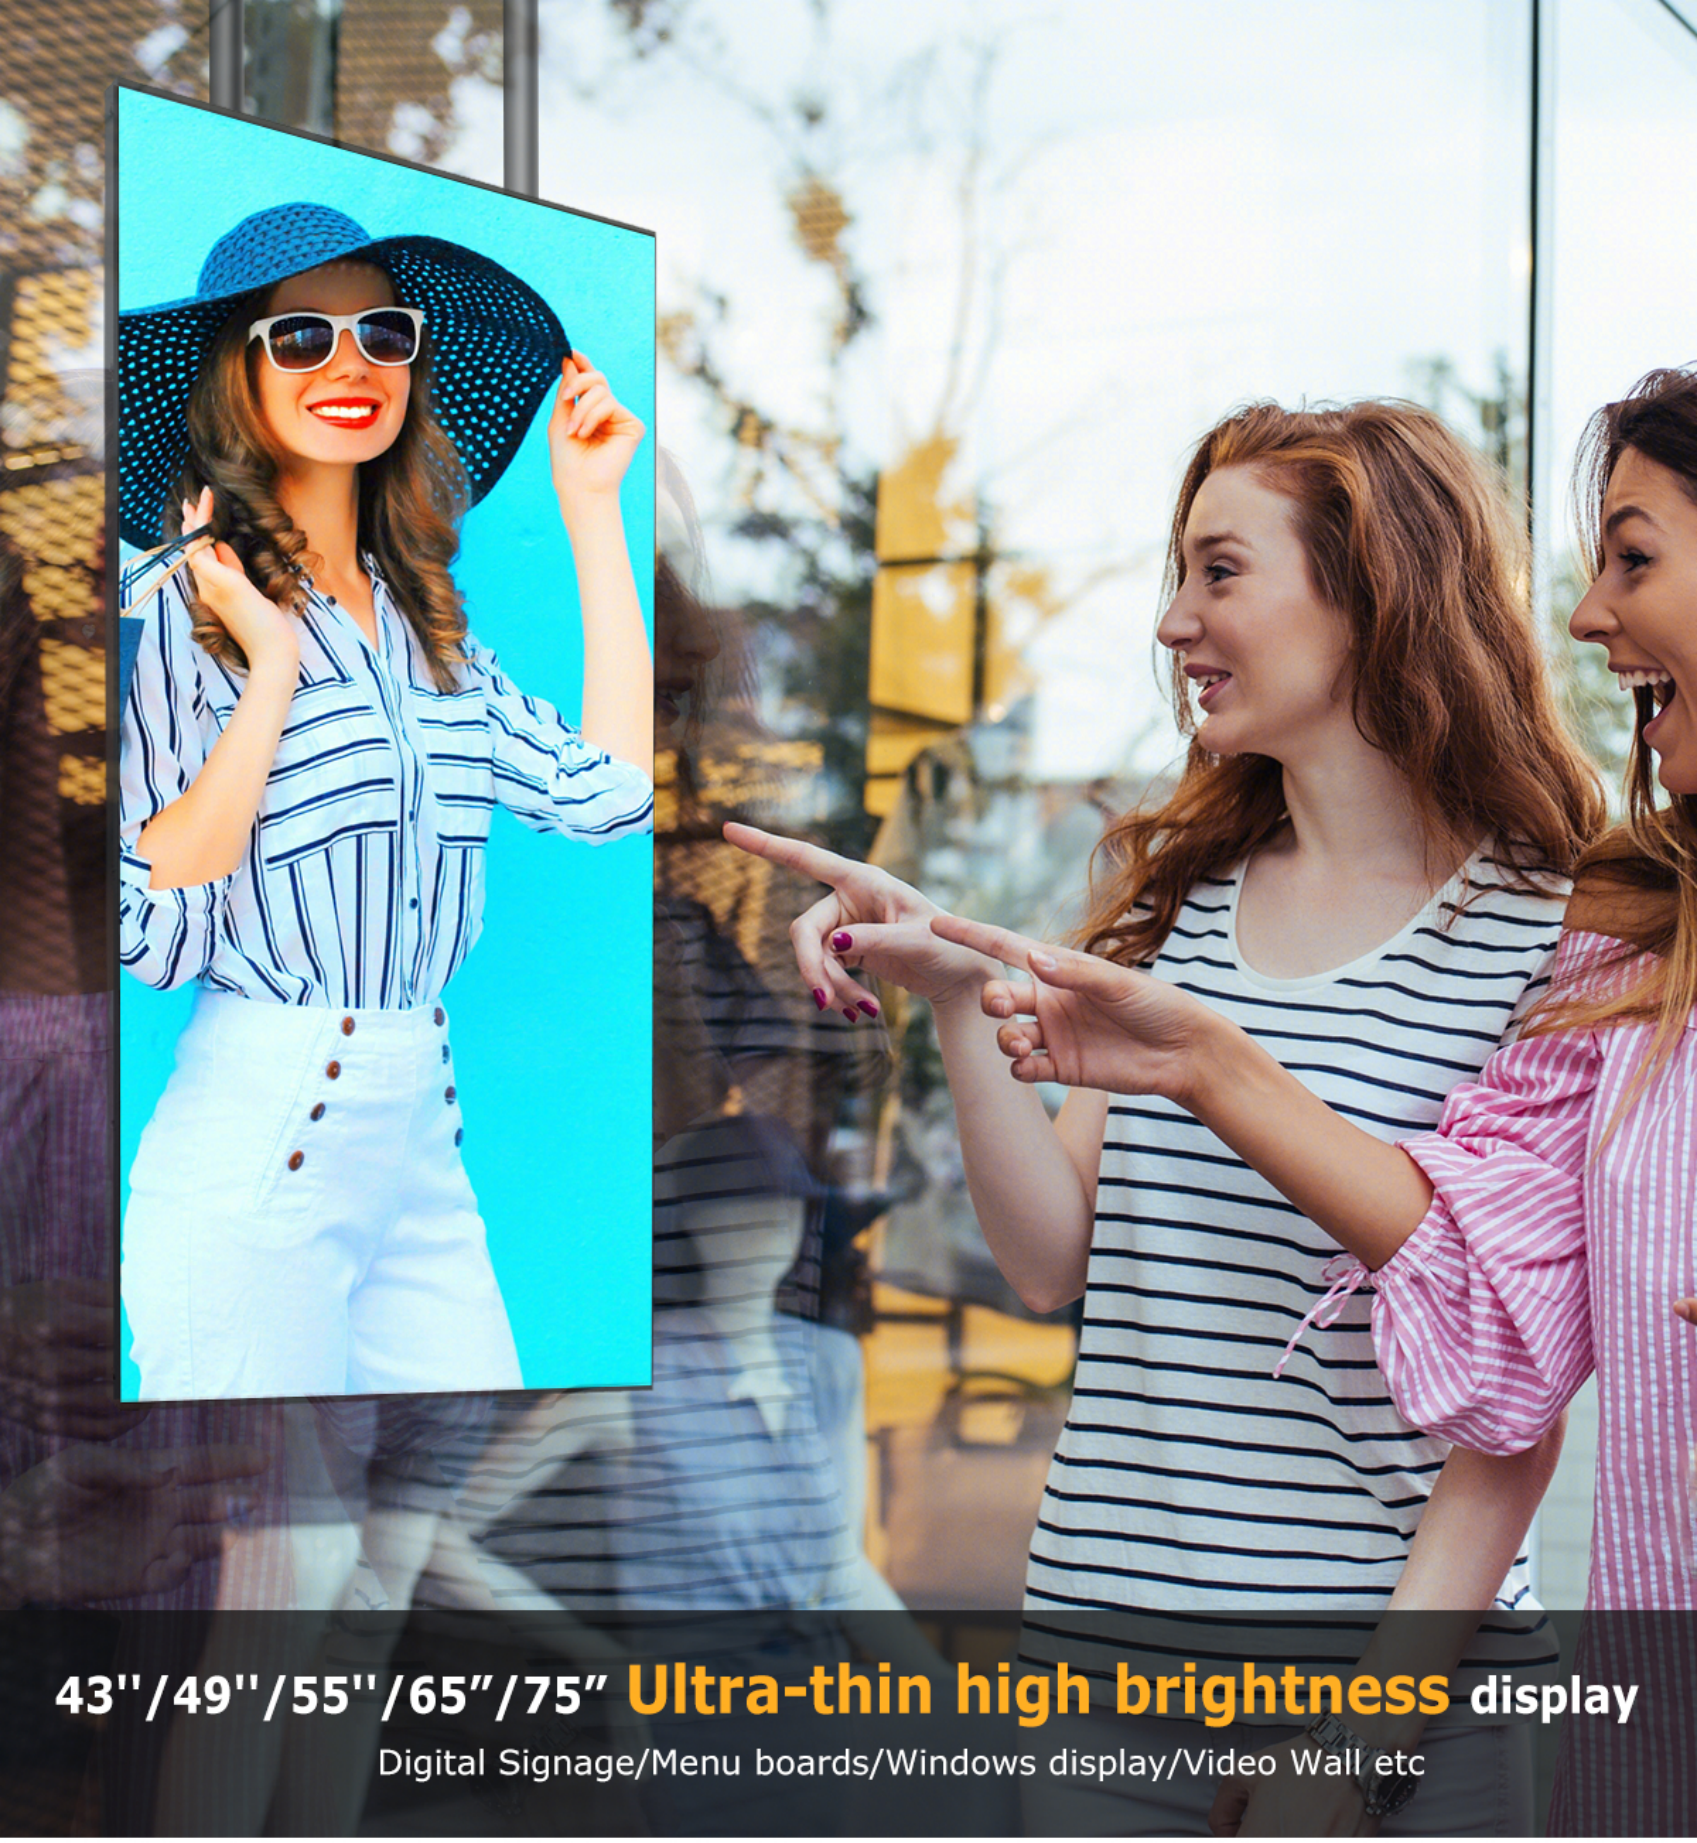

# 43''/49''/55''/65”/75” Ultra-thin high brightness display

Digital Signage/Menu boards/Windows display/Video Wall etc

## Product Features

**31.3mm**
Super slim design

**4.5mm**
Equal & ultra narrow edge

**500-2000nits**
High brightness optional

**Light Weight**
Full Aluminum alloy material

**Multiple Installation**
floor stand/wall mounted/ceiling

**24/7 running**

**Landscape/**
**Portrait Orientation**

**Modular Design**
Easy repair for clear modules

## *High Brightness Indoor/Semi outdoor*

500-2000 nits high brightness optional

To be used as digital menu board/window display/video wall

500 nits

2000 nits

## *98% Oversized Screen Experience*

Extremely 4-side isometric

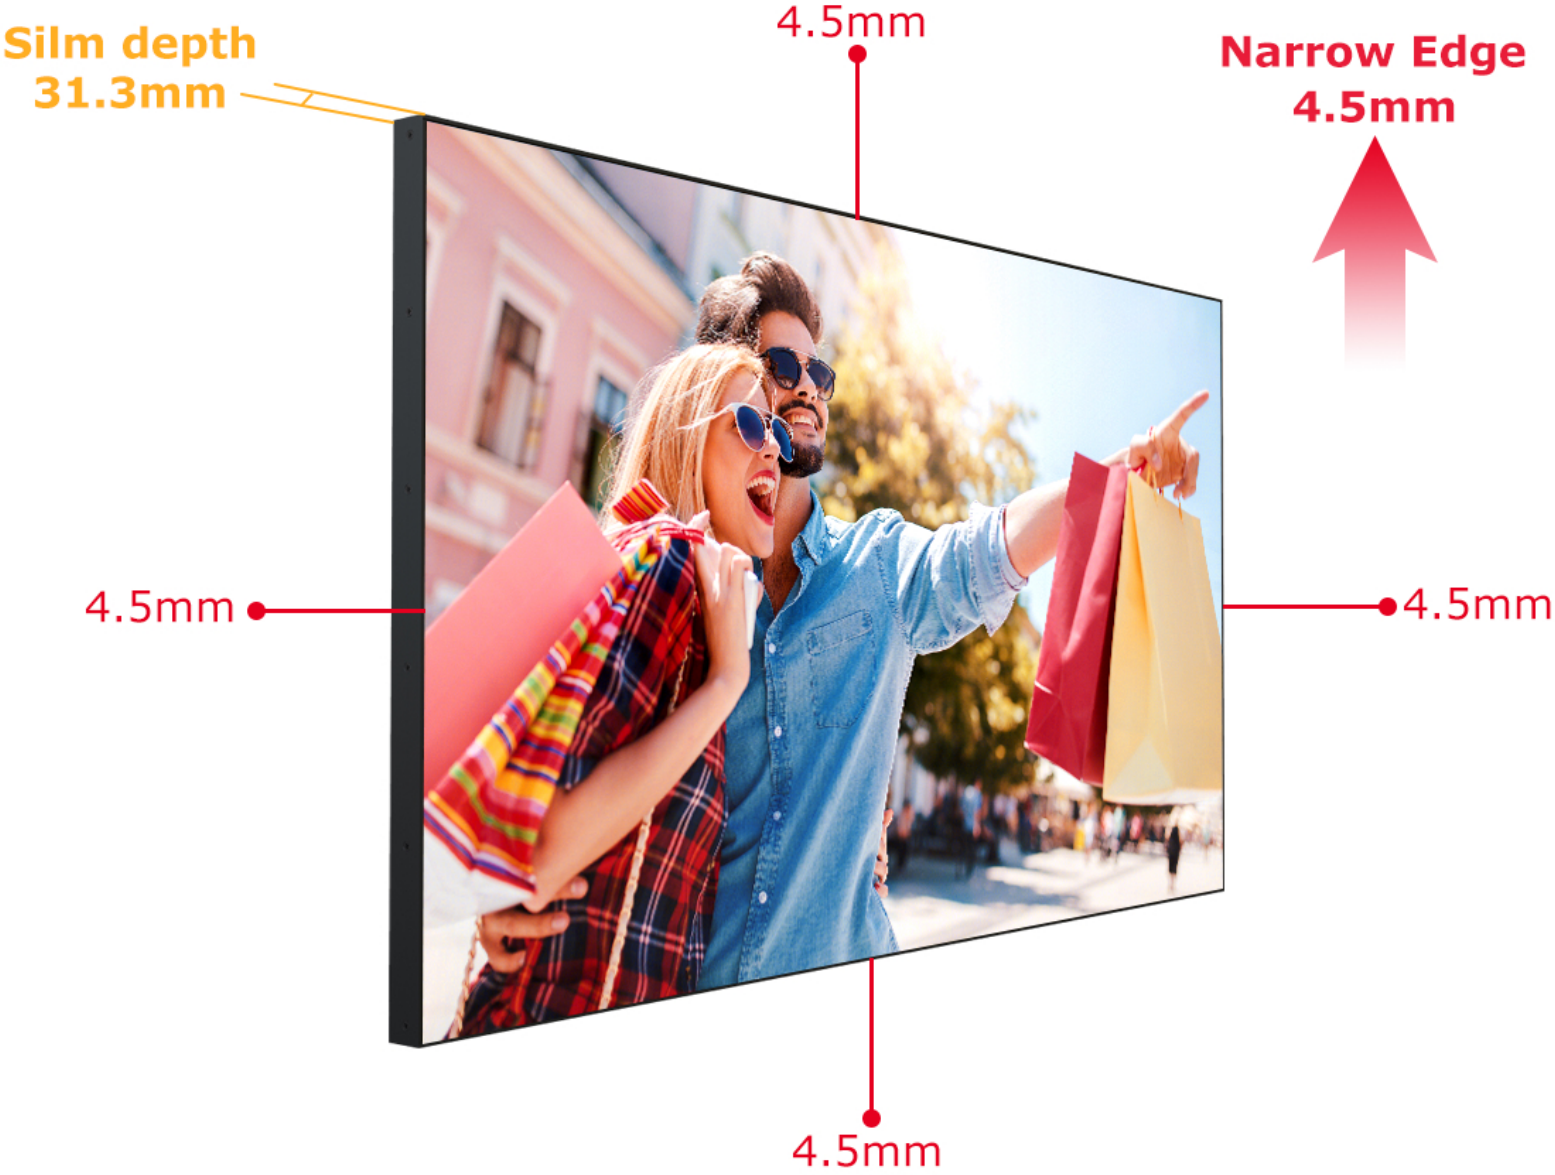

## Horizontal/Vertical Screen Intelligent Switching

Horizontal screen mode and vertical screen mode can be switched as needed

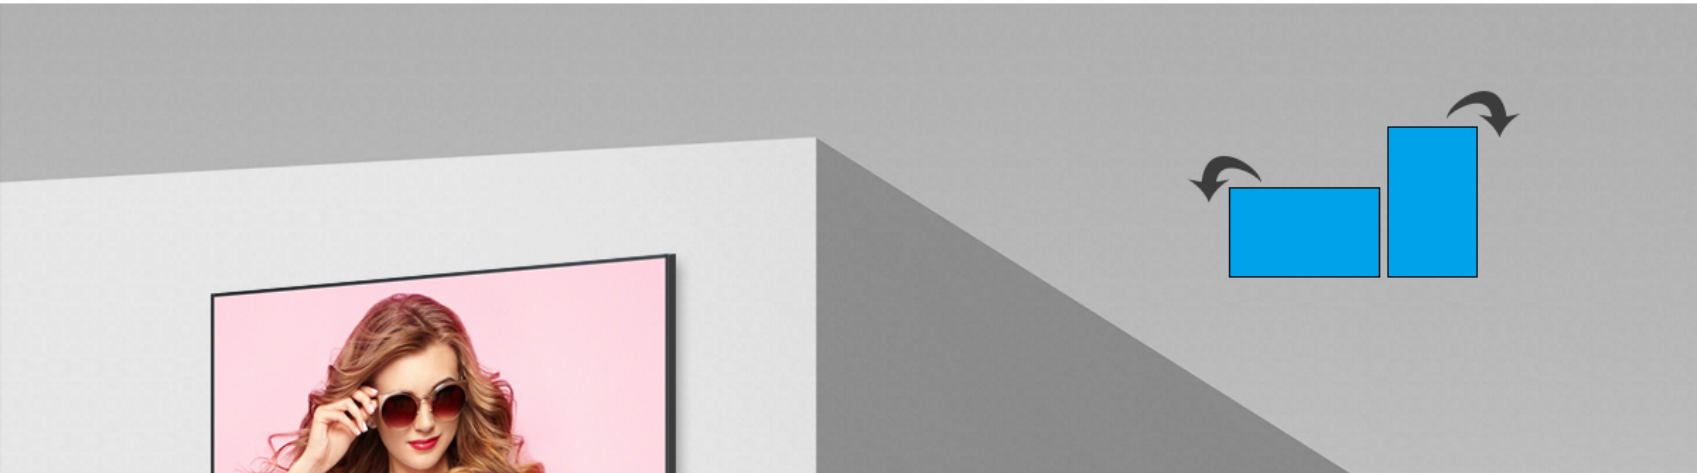

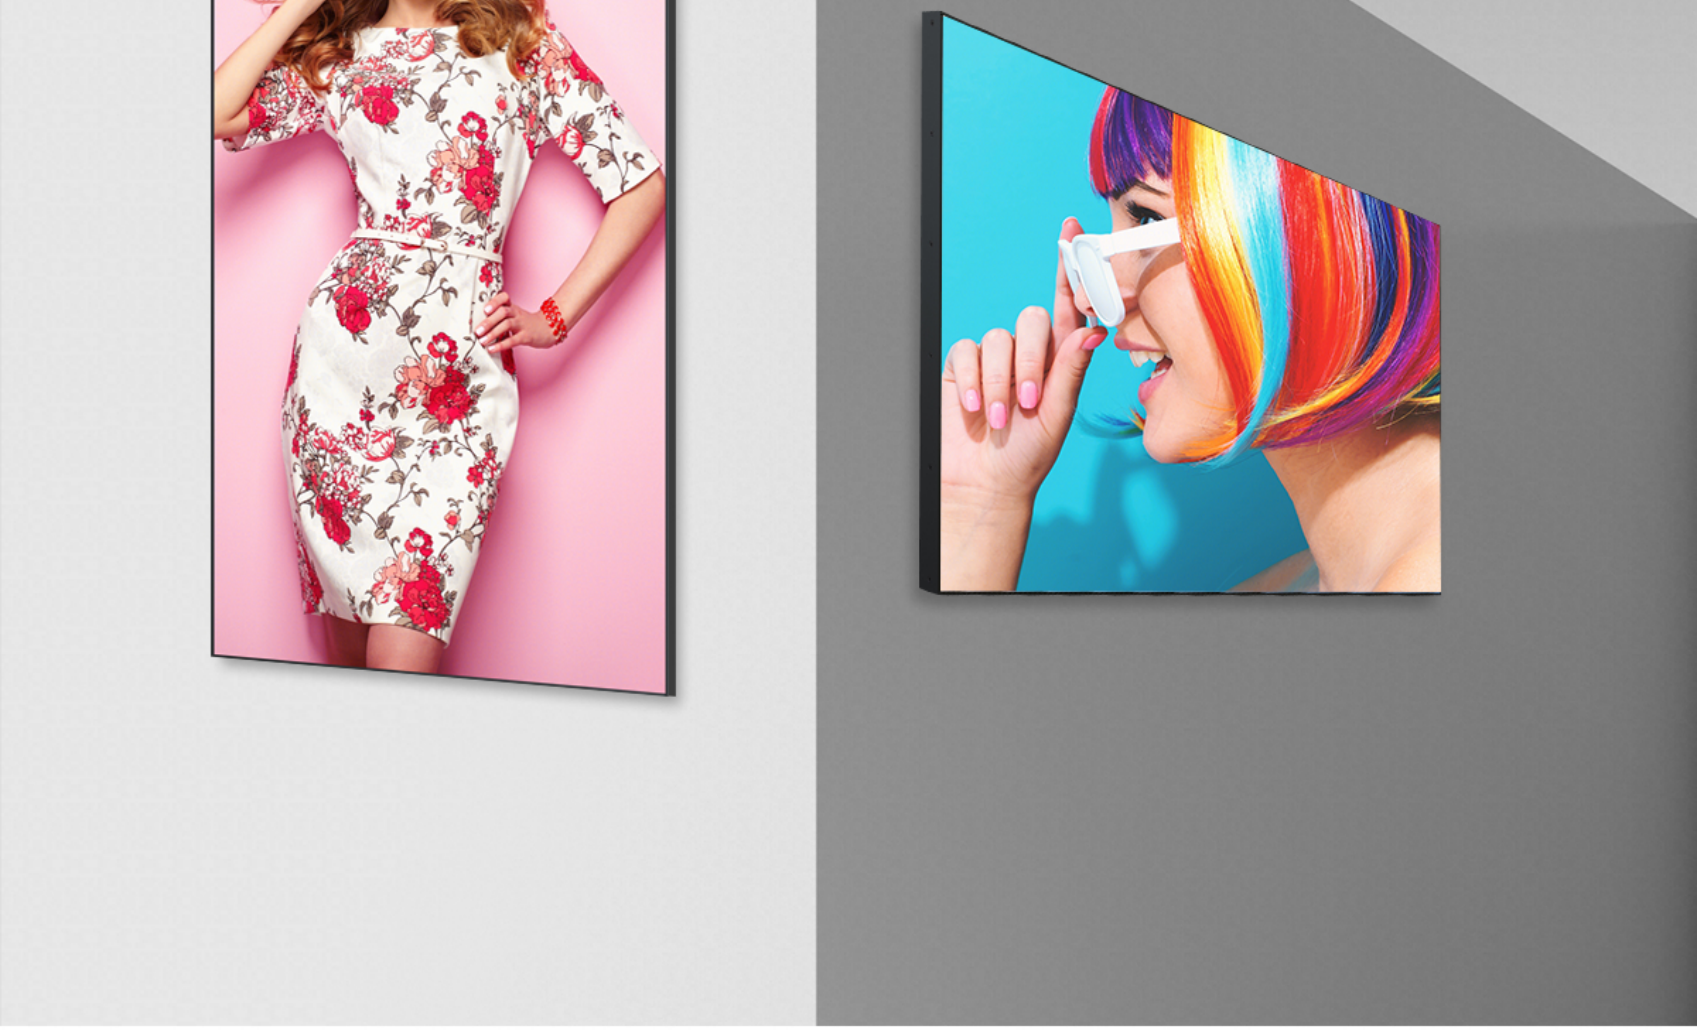

## Bluetooth/ IR remote control

LOREM
BRAND NAME 30 SPF
LOREM IPSUM
LOREM
BRAND NAME 30 SPF
LOREM IPSUM
BRAND NAME
SUNSCREEN PROTECTION
OK

## Customizable Size

The size diversification choice, achieves satisfies each user

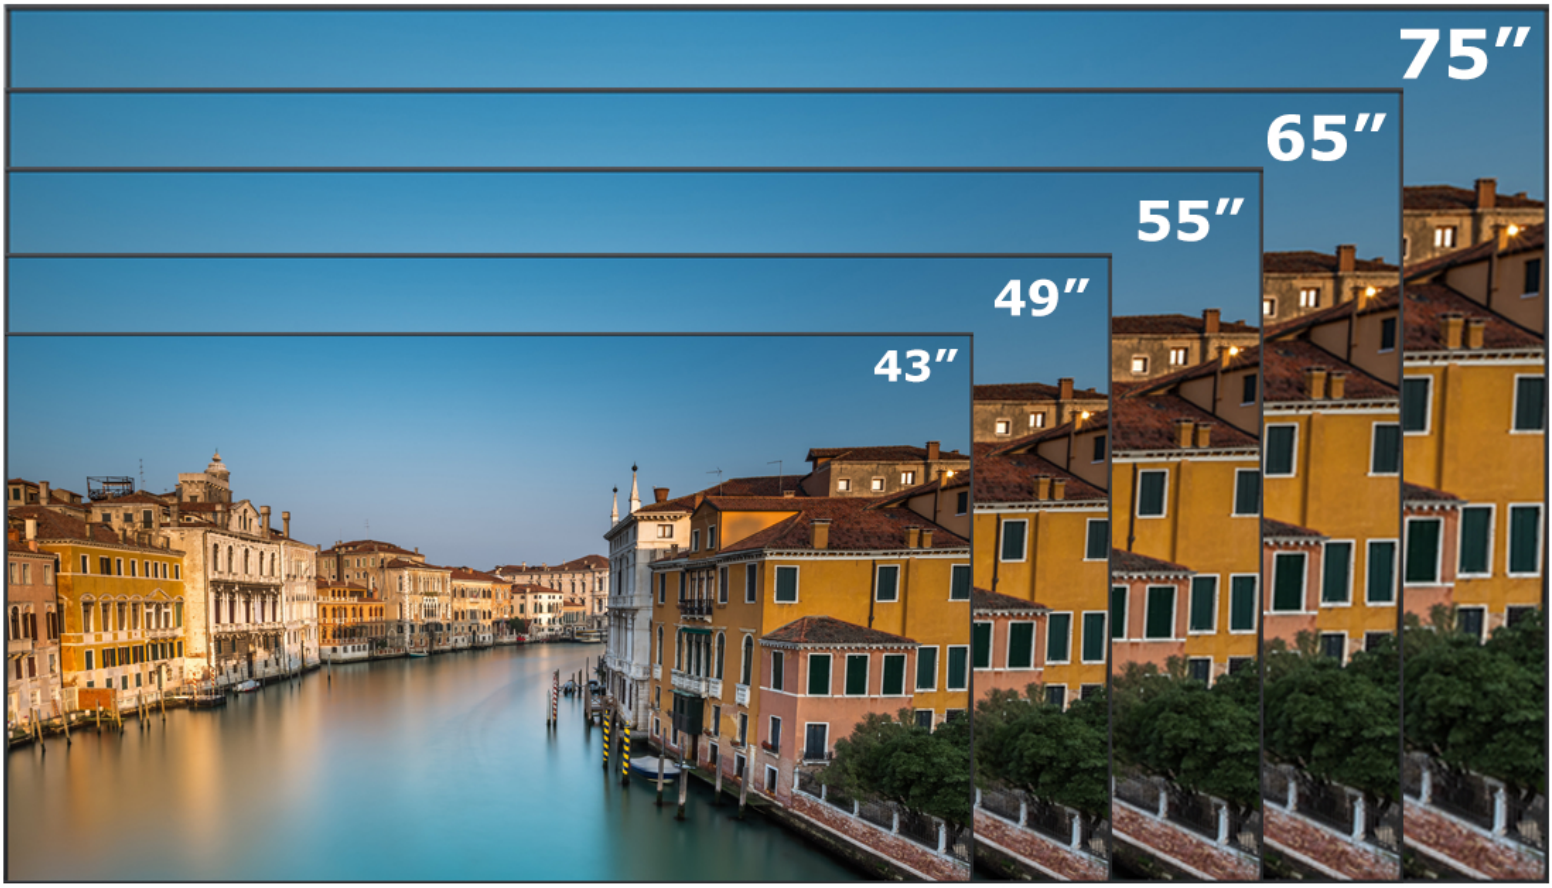

## Multiple splicing solutions

Conventional

Horizontal screen

Vertical screen

Heteromorphic splicing

## *Multi-Installation Way*

Floor stand/wall mounted/suspended,
a variety of installation methods, support custom use

## Popular Scenes

COFFEE
HOUSE
BEST RESTAURANT
HOT DRINKS
MINI BITES
DESSERTS
Coffee house
COFFEE
Coffee TIME
Best Coffee
HOT DRINKS

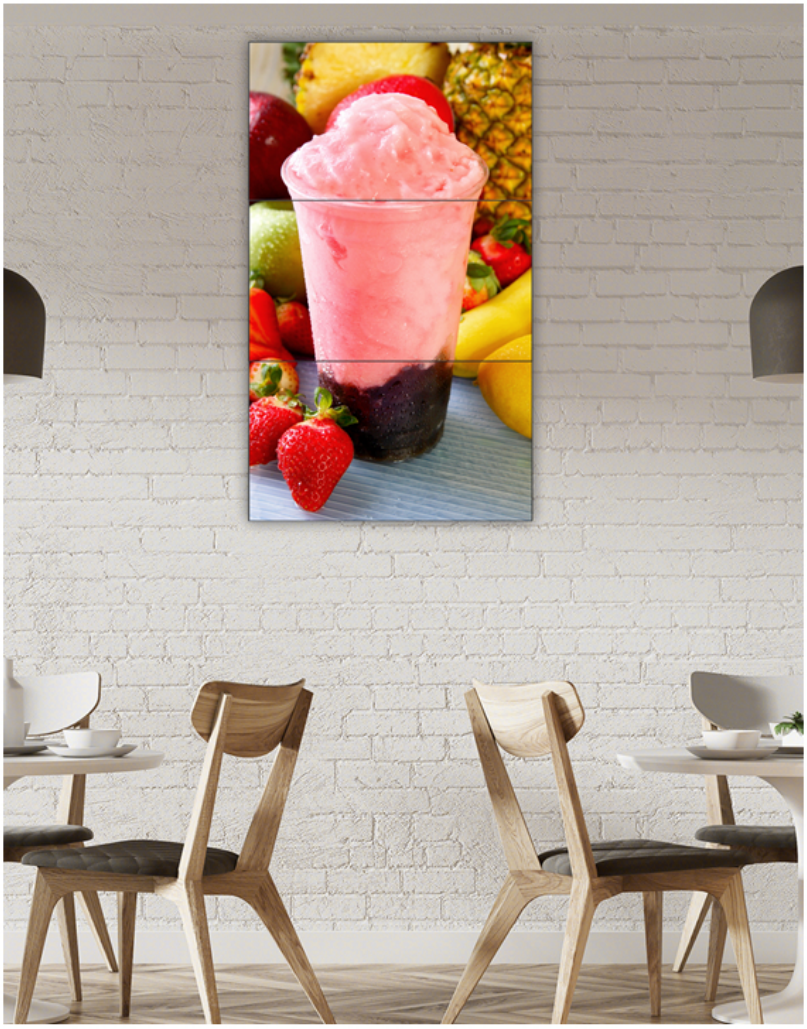

## Parameter

# Kontech window display spec

| | | | | | | |
|---|---|---|---|---|---|---|
| Application | | To be used as digital menu board/window display/Video wall | | | | |
| Model | | WDF series | | | | |
| Cabinet | Material | Aluminum | | | | |
| | Color | Black | | | | |
| | Safety glass | NA | | | | |
| | Dimensions | 954.1*57.1*545.1 mm | 1088.9*57.1*620.3 mm | 1222.8*57.1*696.2 mm | 1441.7*57.1*818.9 mm | 1662.8*57.1*943.7 mm |
| | Net.Weight | 6.7kg | 8.8kg | 11.2kg | 13.8kg | 16.6kg |
| LCD Panel | Screen Diagonal | 43inch | 49inch | 55inch | 65inch | 75inch |
| | Resolution (H x V) | 1920x1080/3840*2160 | 1920x1080/3840*2160 | 1920x1080/3840*2160 | 3840x2160 | 3840x2160 |
| | Contrast(Typical) | 3000:1 | 1200:1 | 3000:1 | 4000:1 | 4000:1 |
| | Brightness(Typical) | 500-2000cd/m2 | 500-2000cd/m2 | 500-2000cd/m2 | 500-2000cd/m2 | 500-2000cd/m2 |
| | Display Color | 8 bits, 16.7M | 8 bits, 16.7M | 8 bits, 16.7M | 8 bits, 16.7M | 8 bits, 16.7M |
| | Response Time(Typical) | 6.5ms | 8ms | 6.5ms | 8ms | 8ms |
| | View Angles LR,UD(CR>10) | 178°/178° | 178°/178° | 178°/178° | 178°/178° | 178°/178° |
| | Backlight rated hours | ⩾50000hours | ⩾50000hours | ⩾50000hours | ⩾50000hours | ⩾50000hours |
| QLED Panel（optional） | | YES | | | | |
| System | | Android 9.0 | | | | |
| Configuration | CPU | Cortex-A35*4 Core@2GHz | | | | |
| | GPU | ARM Mali-G31 MP2 800MHz | | | | |
| | RAM | 2GB | | | | |
| | ROM | 16GB | | | | |
| | LAN | 10/100M | | | | |
| | WIFI | IEEE 802.11b/g/n | | | | |
| Interface | 1 | 2 x USB | | | | |
| | 2 | 1 X HDMI in | | | | |
| | 3 | 1 X LAN | | | | |
| Support | Video | DAT,MPEG,MPG,TS，AVI, MOV, MP4, MKV, TS, M2TS, MTS, M4V, FLV, F4V, PMP，3GP, 3G2, MOV,AVI, MOV, MP4, MKV,, MTS,RM, RMVB | | | | |
| | music | MP2,MP3,WAV,OGG,FLAC,APE,AAC,M4A,AIF,AIFF,ALAW ,WMA ,ALAC | | | | |
| | photo | JPG, JPEG ,BMP ,JPG,JPEG,PNG | | | | |
| AC Power Range | | 90-260V AC,50/60HZ | | | | |

| | | |
|---|---|---|
| Operating Condition | Working Temperature | -20~45°C (-4~ 113°F) |
| | Working Humidity | 10% ~ 90% |
| Feature | On Screen Display | English etc. |
| | Power On when plugged in | Yes |
| | RTC wake up | Yes |
| Accessory | Remote Control | Yes |
| | Power Cable | 1.8 meters |
| | Wall-mounted bracket (optional) | Yes |

## Model Size

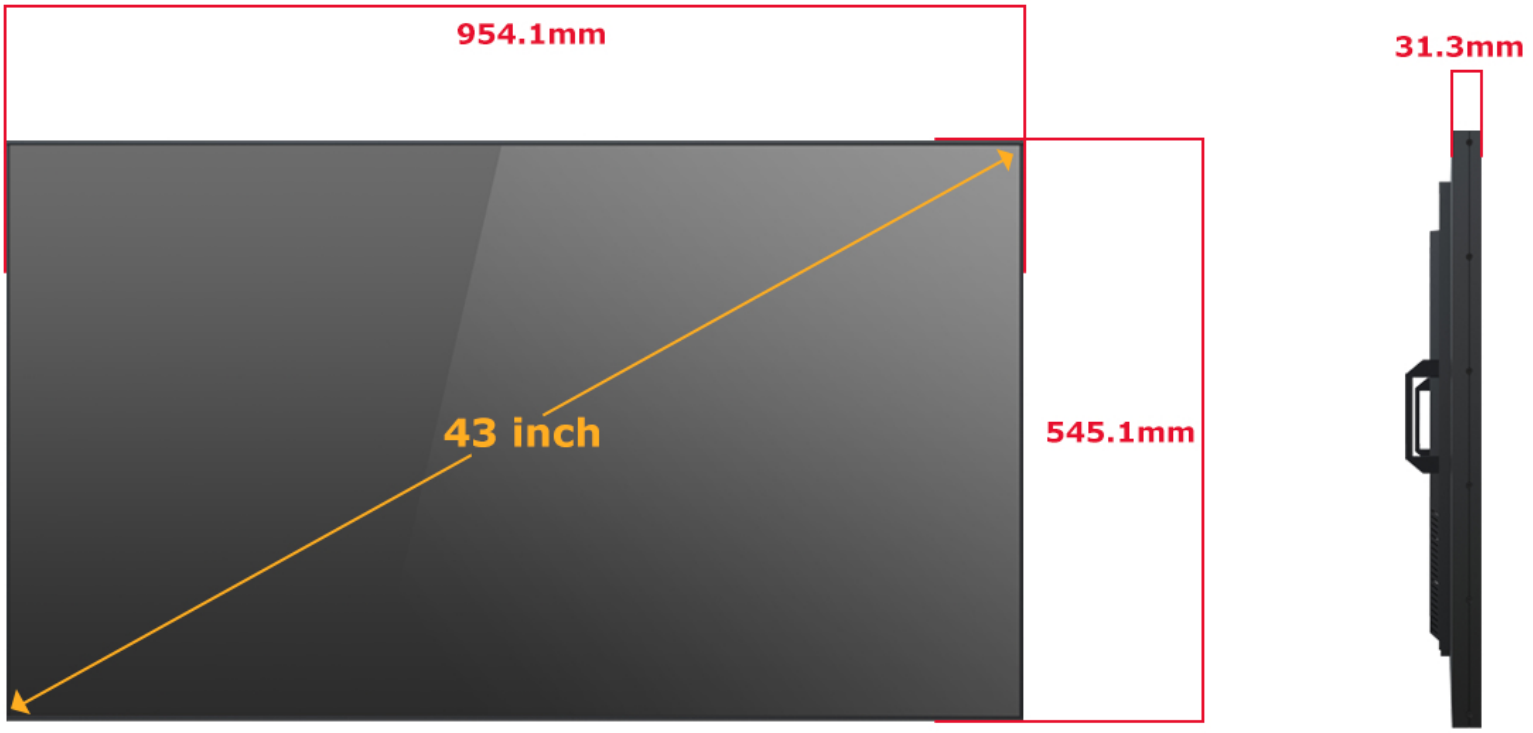

| Product | 43inch | 49inch | 55inch | 65inch | 75inch |
|---|---|---|---|---|---|
| Size(mm) | 954.1*545.1 | 1088.7*620.3 | 122.8*696.2 | 1441.68*818.9 | 1662.86*943.736 |
| Net Weight(kg) | 6.7 | 8.8 | 11.2 | 13.8 | 16.6 |

## *Back Structure*

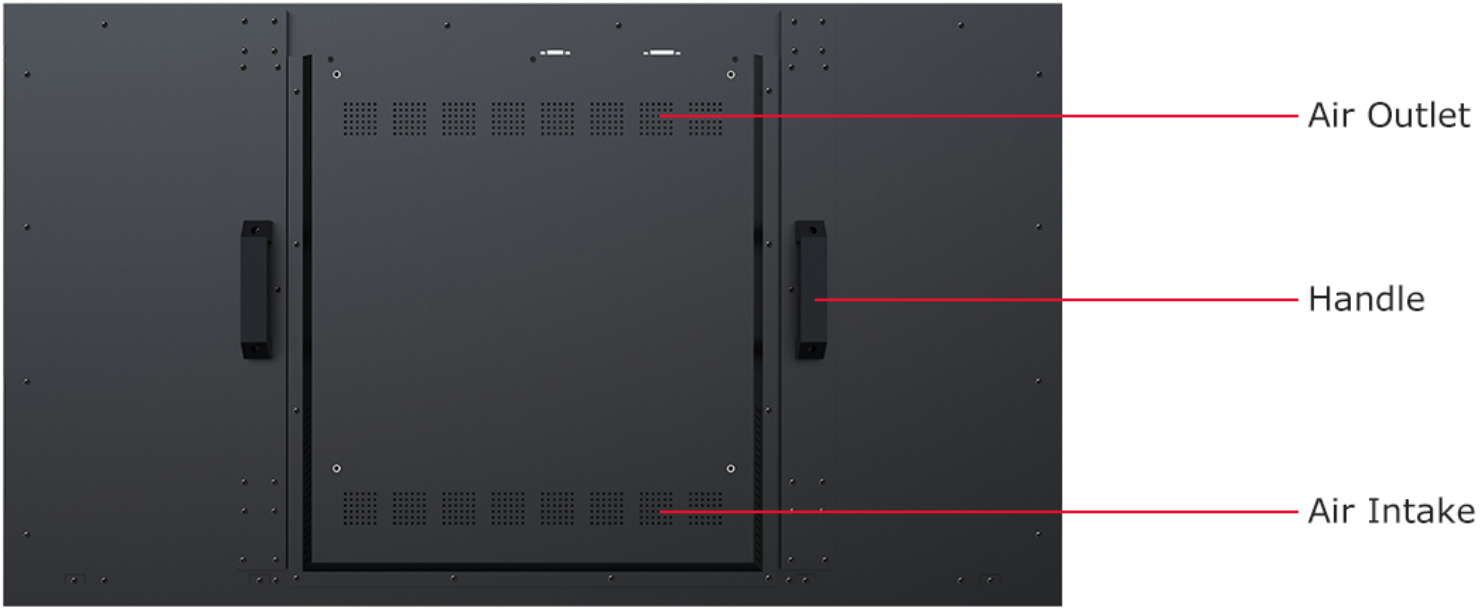

## Packing

KONTECH ELECTRONICS CO., LTD
TEL: +86-755-29892666
E-mail: sales@kontech.com.cn
Web: https: //www.kontechgroup.com/
Office address: 2nd Floor No.2 building, Detai Technology Industrial Park,
Huarong Road, Longhua district, Shenzhen China 518109